


GALVANIZED/STAINLESS GROUND RODS



Hot Dip Galvanized Ground Rods

- Outstanding corrosion resistance; high-strength steel is emersed in molten zinc forming a rust-proof barrier.
- Minimum zinc thickness 3.9 mils. (per ASTM A-123)
- Meets NEMA and ANSI C135.30 requirements.

Note: Rods less than 8' (96 inches) do not meet the NEC Code.



UL Listed "Gold Series" Rods

Catalog Number	Nominal Diameter X Length	Sub & Master Bundle	Wt. per 100	NAED UPC No. 632591-
GR6258 [§]	5/8" x 8'	5 / 100	640	70702-2
GR6250 [§]	5/8" x 10'	5 / 100	941	70703-9
GR7508* [§]	3/4" x 8'	5 / 50	1200	70704-6
GR7510 [§]	3/4" x 10'	5 / 50	1500	70705-3
GR1010 [§]	1" x 10'	25	2700	70762-6

Standard Non-Listed Rods

Catalog Number	Nominal Diameter X Length	Sub & Master Bundle	Wt. per 100	NAED UPC No. 632591-
GR5005*	1/2" x 5'	10 / 100	334	70731-2
GR5006	1/2" x 6'	10 / 100	410	70732-9
GR5008	1/2" x 8'	10 / 100	534	70733-6
GR6255L	5/8" x 5'	5 / 100	470	70700-8
GR6256L	5/8" x 6'	5 / 100	574	70701-5
GR6258L*	5/8" x 8'	5 / 100	770	61299-9
GR6250L*	5/8" x 10'	5 / 100	1040	61304-0
GR7510L*	3/4" x 10'	5 / 50	1500	70705-3

Notes:

*-RUS Listed

[§]-UL Listed, meets the NEC Code

304 Solid Stainless-Steel Ground Rods



Catalog Number	Nominal Diameter X Length	Sub & Master Bundle	Wt. per 100	NAED UPC No. 632591-
S6255S*	5/8" x 5'	5 / 25	525	70737-4
S6256	5/8" x 6'	5 / 25	624	70738-1
S6258**	5/8" x 8'	5 / 25	832	70745-9
S6260	5/8" x 10'	5 / 25	1040	70726-8
S6260S*	5/8" x 10'	5 / 25	1040	70725-1
S6212	5/8" x 12'	5 / 25	1248	70723-7
S7510	3/4" x 10'	5 / 25	1500	70734-3
S7510S*	3/4" x 10'	5 / 25	1500	70759-6
S1010	1" x 10'	5 / 25	2700	70710-7
S1010S*	1" x 10'	5/25	2700	70711-4

Notes:

*Denotes sectional ground rod

** RUS Listed

(Call factory for price and availability of Ground Rods produced from 316 Stainless Steel)

Pig-Tail Rod

Contact factory for quotation of copper clad and hot-dip galvanized pig-tail rods. Provide rod type, size, wire type, gage and length.






COPPER BONDED GROUND RODS

Copper Bonded Ground Rods

- Galvan's copper bonded rods have a heavy, uniform coating of copper metallurgically bonded to a rigid steel core.
- UL Listed rods have 10mil minimum copper plating. UL/RUS models have 13mils of copper.
- Galvan manufactures copper-clad rods under patent 6,527,934

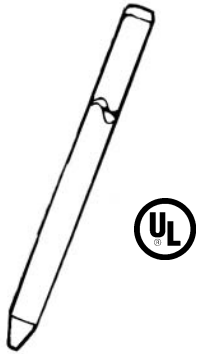

Catalog Number	Nominal Diameter X Length	Sub & Master Bundle	Wt. per 100	NAED UPC No. 632591-
3754	3/8" x 4'	10 / 100	132	61384-2
3755	3/8" x 5'	10 / 100	165	61385-9
3756	3/8" x 6'	10 / 100	200	61386-6
5005	1/2" x 5'	5 / 100	305	61125-1
5006	1/2" x 6'	5 / 100	370	61126-8
5008	1/2" x 8'	5 / 100	500	61128-2
5008L*	1/2" x 8'	5 / 100	545	61138-1
5010	1/2" x 10'	5 / 100	611	61120-6
5010L*	1/2" x 10'	5 / 100	690	61130-5
6254	5/8" x 4'	5 / 100	340	-
6255	5/8" x 5'	5 / 100	424	61585-3
6256	5/8" x 6'	5 / 100	508	61586-0
6258*	5/8" x 8'	5 / 100	680	61588-4
6258G13**	5/8" x 8'	5 / 100	700	61217-3
6260*	5/8" x 10'	5 / 100	847	61580-8
6260G13**	5/8" x 10'	5 / 100	860	61218-0
7508*	3/4" x 8'	5 / 50	992	61548-8
7510*	3/4" x 10'	5 / 50	1240	61340-8
1010*	1" x 10'	25	2248	61440-5

Notes:


*These rods are UL Listed

**These rods meet the requirements of UL & RUS (13 mils minimum of copper).

Rods with less than 10 mils of copper, do not meet UL requirements, nor the NEC Code.

Copper Bonded Sectional Ground Rods

- Threaded on both ends.

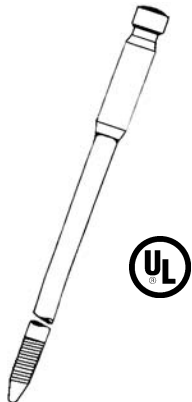

Catalog Number	Nominal Diameter X Length	Sub & Master Bundle	Wt. per 100	NAED UPC No. 632591-
5008LS*	1/2" x 8'	5/100	545	63138-9
5010LS*	1/2" x 10'	5/100	690	63130-3
6258S*	5/8" x 8'	5/100	678	63588-2
6258G13S**	5/8" x 8'	5/100	700	61121-3
6260S*	5/8" x 10'	5/100	847	63580-6
6260G13S**	5/8" x 10'	5/100	871	61121-3
7508S*	3/4" x 8'	5/50	922	63348-2
7510S*	3/4" x 10'	5/50	1240	63340-6
1010S*	1" x 10'	25	2248	63440-3

Notes:

*These rods are UL Listed

**These rods meet the requirements of UL & RUS (13 mils minimum of copper).

Rods with less than 10 mils of copper, **do not** meet UL requirements nor the NEC Code.